

REGULATED DC POWER SUPPLIES.

PRODUCT CATALOG 2011



DELTAELEKTRONIKA
DC POWER SUPPLIES

Table of contents:

SM-series

- SM6000-Series 2
- SM3300-Series 4
- SM3000-Series 6
- SM1500-Series 8
- SM800-Series 10

ES-series

- ES300-Series 12
- ES150-Series 13
- EST150-Series 15

Rack units

- 1200S-Series 16
- S280-Series 17
- 240S-Series 18
- SX-Series 19
- U-Series 20

Interfaces

- PSC-Series 21
- ANALOG-Series 24


2

SM6000 Series

6000 W DC POWER SUPPLIES

APPLICATIONS & OPTIONS

SM6000 Series



Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fans are temperature controlled

Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Stacking is allowed, space between units is not required
- High power system configuration from multiple units
- 19" rack mounting or for laboratory use (feet included)
- Remote sensing
- Interlock

Typical Applications

- Solar Inverter testing, PV-simulation
- Plasma chambers
- Hybrid car test systems
- ATE in industrial production lines
- Automotive battery simulation
- Controlled battery (dis)charging
- Lasers
- Driving PWM-controlled DC-motors
- Accurate current sources
- Aerospace and military equipment

Available Options



Increased Output Power
The conservatively rated unit allows to deliver extra output power with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Speed Programming
A 10 to 20 times higher programming speed (down to 0.4 ms rise time at full load) and

lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.



Two-Quadrant Output: Power Sink
Two quadrant operation maintains the output voltage constant regardless the output power is positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.



Sequencer
Arbitrary Waveform generator or stand-alone automation. The sequencer is integrated in the Ethernet controller.



High Voltage Isolation
A higher output isolation allows series operation up to 1200 V.



High Input Voltage
Higher input voltages possible for operation at line voltages of 440 V AC and 480 V AC (for USA).

More information about this:
Page 21



Software Control and Interfaces
Factory installed programming interfaces:

- Ethernet controller (incl. sequencer)
- PROFIBUS controller
- CANBUS controller
- RS232 controller
- IEEE488 controller
- ISO AMP CARD – isolated analog

Details about interfaces:
Page 21-24



Digital Voltage and Current Setting
Reliable, longlife digital encoders can be implemented at the front panel. Includes total front panel



lock (also for CV/CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.



Secured Voltage and Current Setting
For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected with a plastic cap from accidental adjusting.

Dimensions and Weight

Width = 19" Weight = 27 kg
Height = 4 U

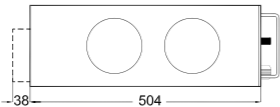

Specifications

- Three phase input : 380 / 400 / 415 V AC, optional 440 / 480V AC V_{nom.} line to line (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.98 (at 100% load)
- Efficiency : up to 90% (at full load)
- Output ripple and spikes : from 0.8 mV_{rms} / 8 mV_{pp}
- Regulation : from 2.5 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 3.3 ms (10-90%), optional from 0.4 ms
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : 5.10⁻⁵ / 10.10⁻⁵
- MTBF : 500.000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

riesenia

www.eleco.sk

meranie


SM3300 Series

3300 W DC POWER SUPPLIES

APPLICATIONS & OPTIONS

SM3300 Series

New unit:
available
2011,
2nd quarter

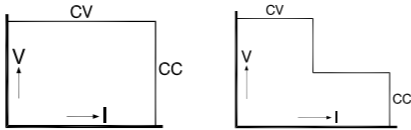

Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fans are temperature controlled


Functionalities

- Operation on single and three phase input voltages
- Standard Ethernet interface, LXI class C
- Large user display, menu driven operation
- Durable digital encoders for voltage and current adjustment
- Plug and play optional interfaces
- USB input for exchange of settings and wave forms

Models	Voltage range	Current range
SM 18 - 220	0 - 18 V	0 - 220 A
SM 66 - AR - 110	0 - 33 V	0 - 110 A
Autoranging output	0 - 66 V	0 - 55 A
SM 330 - AR - 22	0 - 165 V	0 - 22 A
Autoranging output	0 - 330 V	0 - 11 A
SM 660 - AR - 11	0 - 330 V	0 - 11 A
Autoranging output	0 - 660 V	0 - 5.5 A

Dimensions and Weight

Width = 19" Weight = 15 kg
Height = 2 U

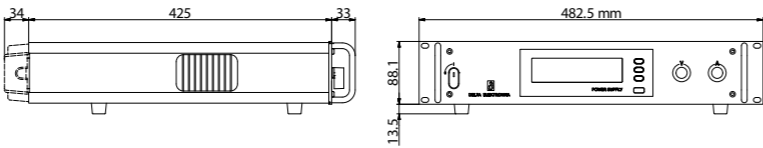

Specifications

- Single and Three phase input : 180-528 V AC (single or three phase 48-62 Hz) derating at low input voltage
- Active Power Factor Correction (PFC) : up to 0.99 (at 100 % load)
- Efficiency : up to 90% (at full load)
- Output ripple and spikes : from 1.6mV_{rms} / 8mV_{pp}
- Regulation : from 5 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 7 ms (10-90%), optional from 0.3 ms
- Output voltage and current stability : from 4.10⁻⁵ / 10.10⁻⁵
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards


- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

The specifications are preliminary and subject to changes

Typical Applications


- Solar Inverter testing, PV-simulation
- Car test systems
- ATE in industrial production lines
- Plasma chambers
- Automotive battery simulation
- Controlled battery (dis)charging
- Lasers
- Driving PWM-controlled DC-motors
- Accurate current sources
- Aerospace and military equipment

Standard Features



Digital Voltage and Current Setting
Reliable, longlife digital encoders are implemented at the front panel. Includes total front panel

lock (also for CV / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.



Ethernet Controller
A 16 bit Ethernet interface for programming and monitoring.




Sequencer
Arbitrary Waveform generator or stand-alone automation.

More information about this:
Page 21



High Voltage Isolation
A higher output isolation allows series operation up to 1200 V.



USB-Input
Front panel USB-input for exchange of settings and waveforms.

Available Options



Software Control and Interfaces
Field installable interfaces:

- PROFIBUS controller
- CANBUS controller
- RS232 controller
- IEEE488 controller
- Isolated Analog Programming
- Master / Slave controller

Note: standard no analog interface
See our website for details about the new interfaces specifically for SM3300 (interfaces in this catalog are not compatible with SM3300).




High Speed Programming
A 10 to 20 times higher programming speed (down to 0.3 ms rise time at full load) and

lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.



Two-Quadrant Output: Power Sink
Two quadrant operation maintains the output voltage constant regardless the output power is positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.



Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fans are temperature controlled

Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Stacking is allowed , space between units is not required
- 19" rack mounting or for laboratory use (feet included)
- High power system configuration from multiple units
- Remote sensing

Models	Voltage range	Current range
SM 15 - 200 D	0 - 15 V	0 - 200 A
SM 30 - 100 D	0 - 30 V	0 - 100 A
SM 45 - 70 D	0 - 45 V	0 - 70 A
SM 70 - 45 D	0 - 70 V	0 - 45 A
SM 120 - 25 D	0 - 120 V	0 - 25 A
SM 300 - 10 D	0 - 300 V	0 - 10 A

Typical Applications

- Solar Inverter testing, PV-simulation
- Plasma chambers
- Car test systems
- ATE in industrial production lines
- Automotive battery simulation
- Controlled battery (dis)charging
- Lasers
- Driving PWM-controlled DC-motors
- Accurate current sources
- Aerospace and military equipment

Available Options



Increased Output Power
The conservatively rated unit allows to deliver extra output power with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Speed Programming
A 10 to 20 times higher programming speed (down to 0.33 ms rise time at full load)

and lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.



Two-Quadrant Output: Power Sink
Two quadrant operation maintains the output voltage constant regardless the output power is positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.



Sequencer
Arbitrary Waveform generator or stand-alone automation. The sequencer is integrated in the Ethernet controller.

More information about this:
Page 21



High Voltage Isolation
A higher output isolation allows series operation up to 1000 V.



Software Control and Interfaces
Factory installed programming interfaces:

- Ethernet controller (incl. sequencer)
- PROFIBUS controller
- CANBUS controller
- RS232 controller
- IEEE488 controller
- ISO AMP CARD – isolated analog


Details about interfaces:
Page 21-24



Secured Voltage and Current Setting
For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected with a plastic cap from accidental adjusting.

Dimensions and Weight

Width = 19" Weight = 15 kg
Height = 3 U

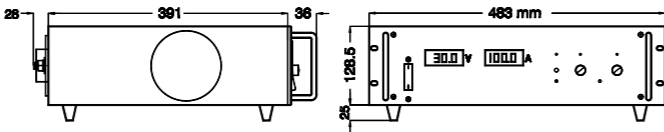

Specifications

- Three phase input : 380 / 400 / 415 V AC, V_{nom} line to line (48-62 Hz)
- Efficiency : up to 90% (at full load)
- Output ripple and spikes : from 1.6 mV_{rms} / 8 mV_{pp}
- Regulation : from 5 mV (0-100% load step)
- Recovery time : from 100 μ s (50-100% load step)
- Programming speed : 7 ms (10-90%), optional from 0.33 ms
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : $4 \cdot 10^{-5}$ / $10 \cdot 10^{-5}$
- MTBF : 500.000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards


- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

SM1500 Series

1500 W DC POWER SUPPLIES

APPLICATIONS & OPTIONS

SM1500 Series

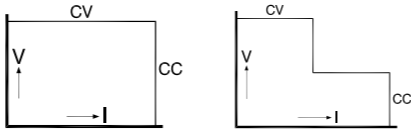

Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fans are temperature controlled


Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Stacking is allowed, space between units is not required
- 19" rack mounting or for laboratory use (feet included)
- High power system configuration from multiple units
- Remote sensing
- Interlock

Models	Voltage range	Current range
SM 15 - 100	0 - 15 V	0 - 100 A
SM 35 - 45	0 - 35 V	0 - 45 A
SM 52 - 30	0 - 52 V	0 - 30 A
SM 52 - AR - 60	0 - 26 V	0 - 60 A
Autoranging output	0 - 52 V	0 - 30 A
SM 70 - 22	0 - 70 V	0 - 22 A
SM 120 - 13	0 - 120 V	0 - 13 A
SM 300 - 5	0 - 300 V	0 - 5 A
SM 400 - AR - 8	0 - 200 V	0 - 8 A
Autoranging output	0 - 400 V	0 - 4 A

Dimensions and Weight

Width = 19" Weight = 9,9 kg
Height = 2 U

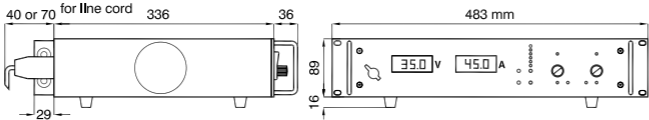

Specifications

- Single phase input : 90-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99 (at 100 % load)
- Efficiency : up to 91% (at full load)
- Output ripple and spikes : from 1.8 mV_{rms} / 8 mV_{pp}
- Regulation : from 0.5 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 3.4 ms (10-90%), optional from 0.2 ms
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : 6.10⁻⁵ / 9.10⁻⁵
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Typical Applications

- Solar Inverter testing, PV-simulation
- Semiconductor burn-in & processing
- Car test systems
- ATE in industrial production lines
- Lasers
- Controlled battery (dis)charging
- Component device testing
- Driving PWM-controlled DC-motors
- Accurate current sources
- Aerospace and military equipment

Available Options



Increased Output Power

The conservatively rated unit allows to deliver extra output power with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Speed Programming

A 10 to 20 times higher programming speed (down to 0.2 ms rise time at full load) and

lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.



Two-Quadrant Output: Power Sink

Two quadrant operation maintains the output voltage constant regardless the output power is

positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.



Sequencer

Arbitrary Waveform generator or stand-alone automation.

The sequencer is integrated in the Ethernet controller.



More information about this:
Page 21



High Voltage Isolation

A higher output isolation allows series operation up to 1000 V.



Secured Voltage and Current Setting

For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected

with a plastic cap from accidental adjusting.



Software Control and Interfaces

Factory installed programming interfaces:

- Ethernet controller (incl. sequencer)
- PROFIBUS controller
- CANBUS controller
- RS232 controller
- IEEE488 controller
- ISO AMP CARD – isolated analog




Details about interfaces:
Page 21-24



Digital Voltage and Current Setting

Reliable, longlife digital encoders can be implemented at the front panel. Includes total front panel

lock (also for CV / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.

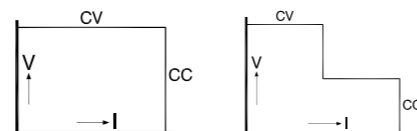

Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fans are temperature controlled

Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Stacking is allowed, space between units is not required
- High power system configuration from multiple units
- Laboratory use (feet included), 19" rack mounting optional
- Remote sensing
- Interlock

Typical Applications

- Accurate current sources
- Electronic circuit development
- Component device testing
- ATE in industrial production lines
- Automotive battery simulation
- Controlled battery (dis)charging
- Lasers
- Driving PWM-controlled DC-motors
- Medical research equipment
- Aerospace and military equipment

Available Options



Increased Output Power

The conservatively rated unit allows to deliver extra output power with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Speed Programming

A 10 to 20 times higher programming speed (down to 0.2 ms rise time at full load) and

lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.



Two-Quadrant Output: Power Sink

Two quadrant operation maintains the output voltage constant regardless the output power is

positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.



Sequencer

Arbitrary Waveform generator or stand-alone automation.

The sequencer is integrated in the Ethernet controller.



High Voltage Isolation

A higher output isolation allows series operation up to 1000 V.



Secured Voltage and Current Setting

For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected

with a plastic cap from accidental adjusting.

More information about this:
Page 21



Software Control and Interfaces

Factory installed programming interfaces:

- Ethernet controller (incl. sequencer)
- PROFIBUS controller
- CANBUS controller
- RS232 controller
- IEEE488 controller
- ISO AMP CARD – isolated analog

Details about interfaces:
Page 21-24



Digital Voltage and Current Setting

Reliable, longlife digital encoders are implemented at the front panel.

Includes total front panel lock (also for CV / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.



Front Power Output

Bind posts at the front panel instead of at the rear panel.




19" Rack Mounting Adapter

The 19" mounting adapters makes it possible to position one or two units side by side in a 19" rack.

Dimensions and Weight

Width = 19" Weight = 5,4 kg
Height = 2 U

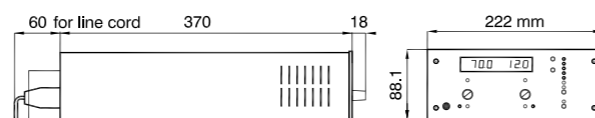

Specifications

- Single phase input : 90-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99 (at 100% load)
- Efficiency : up to 89% (at full load)
- Output ripple and spikes : from 2 mV_{rms} / 8 mV_{pp}
- Regulation : from 0.2 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 4 ms (10-90%), optional from 0.2 ms
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : 6.10⁻⁵ / 9.10⁻⁵
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards


- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

ES300 Series

300 W DC POWER SUPPLIES

ES150 Series

150 W DC POWER SUPPLIES




Features

- Very low output ripple and spikes
- EMC surpasses CE requirements: low emission & high immunity
- High programming speed
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- Designed for long life at full power

Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Voltage and current control with 10 turn potentiometers
- For laboratory use or optional 19" rack mounting

Model	Voltage range	Current range
ES 030 - 10	0 - 30 V	0 - 10 A



Features

- Very low output ripple and spikes
- EMC surpasses CE requirements: low emission & high immunity
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- Designed for long life at full power


Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Voltage and current control with 10 turn potentiometers
- For laboratory use or optional 19" rack mounting
- Convection cooling

Models	Voltage range	Current range
ES 015 - 10	0 - 15 V	0 - 10 A
ES 030 - 5	0 - 30 V	0 - 5 A
ES 075 - 2	0 - 75 V	0 - 2 A
ES 0300 - 0.45	0 - 300 V	0 - 450 mA

Dimensions and Weight

Width = half 19" Weight = 3,1 kg
Height = 66 mm, incl. feet




Specifications

- Single phase input : 92-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99/0.96 (at 100% load)
- Efficiency : up to 86% (at full load)
- Output ripple and spikes : 5 mV_{rms} / 15 mV_{pp}
- Regulation : 10 mV (0-100% load step)
- Recovery time : 50 µs (50-100% load step)
- Programming speed : 0.8 ms (10-90%)
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : 30.10⁻⁵ / 10.10⁻⁴
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards

- Power supply standard : EN 61204-3
- Generic Emission : EN 61000-6-3 (EN55022B)
- Generic Immunity : EN 61000-6-2
- Safety : EN 60950 / EN 61010
- Insulation input / output : 3750 V_{rms}
- Enclosure : IP20

Available Options



Dimensions and Weight

Width = half 19" Weight = 1,7 kg
Height = 66 mm, incl. feet




Specifications

- Single phase input : 90-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99/0.83 (at 100% load)
- Efficiency : up to 84% (at full load)
- Output ripple and spikes : from 0.5 mV_{rms} / 8 mV_{pp}
- Regulation : from 5 mV (0-100% load step)
- Recovery time : from 100 µs (50-100% load step)
- Programming speed : from 7 ms (10-90%)
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : from 10.10⁻⁵ / 10.10⁻⁵
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards

- Power supply standard : EN 61204-3
- Generic Emission : EN 61000-6-3 (EN55022B)
- Generic Immunity : EN 61000-6-2
- Safety : EN 60950 / EN 61010
- Insulation input / output : 3750 V_{rms}
- Enclosure : IP20

Available Options





Applications & Options

ES150 / 300 Series

EST150 Series

150 W, TRIPLE OUTPUT DC POWER SUPPLIES

Typical Applications

- Test and Measurement
- Component device testing
- Medical research equipment
- Controlled battery charging
- ATE in industrial production lines
- Accurate current sources
- Electronic Circuit Development
- Laboratory analysis

Available Options (Not for EST150)



Increased Output Power
The conservatively rated unit allows to deliver extra output power with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Voltage Isolation
A higher output isolation allows series operation up to 1000 V.



Secured Voltage and Current Setting
For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected with a plastic cap from accidental adjusting.

Only available for the ES 150 series



Sequencer
Arbitrary Waveform generator or stand-alone automation. The sequencer is integrated in the Ethernet controller.

More information about this:
Page 21



Rear Power Output and Remote Sensing
Output terminals at the rear panel instead of bind posts at the front panel, includes remote sensing.



Software Control and Interfaces
Factory installed programming interfaces:

- Ethernet controller
- PROFIBUS controller
- CANBUS controller
- RS232 controller

External programming interface modules:


- IEEE488 controller module
- ISO AMP module

Details about interfaces:
Page 21-24



19" Rack Mounting Adapter
Using the 19" mounting adapters, it is possible to position the ES units in a 19" rack.

Several configurations possible with multiple ES and / or PSC or ISO AMP modules.



Features

- Very low output ripple and spikes
- EMC surpasses CE requirements: low emission & high immunity
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- Designed for long life at full power

Functionalities



- 3 independent, floating outputs
- Dual voltage tracking or series tracking mode
- 3 output On / Off buttons
- Convection cooling
- Voltage and current control with 10 turn potentiometers



Model	Voltage range	Current range
EST 150		
Output 1	0 - 20 V	0 - 2.5 A
Output 2	0 - 20 V	0 - 2.5 A
Output 3	0 - 10 V	0 - 5 A

Dimensions and Weight

Width = half 19" Weight = 3,5 kg
Height = 146 mm, incl. feet

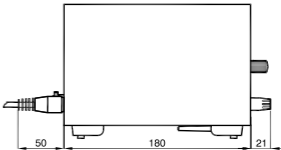

Specifications

- Single phase input : 90-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99/0.83 (at 100% load)
- Efficiency : up to 81% (at full load)
- Output ripple and spikes : from 0.5 mV_{rms} / 8 mV_{pp}
- Regulation : from 5 mV (0-100% load step)
- Recovery time : 100 µs (50-100% load step)
- Tracking accuracy : 0.5%
- Output voltage and current stability : 10.10⁻⁵ / 10.10⁻⁵
- MTBF : 500.000 hrs
- Operating ambient temperature : -20 to +50 °C


Standards

- Power supply standard : EN 61204-3
- Generic Emission : EN 61000-6-3 (EN55022B)
- Generic Immunity : EN 61000-6-2
- Safety : EN 60950 / EN 61010 / SELV
- Insulation input / output : 3750 V_{rms}
- Enclosure : IP20

riesenia
www.elebo.sk

1200S Series

600 W & 1200 W DC POWER SUPPLIES



Features


- Very high reliability, designed for long life at full power
- EMC surpasses CE requirements: low emission & high immunity
- Protected against all overload and short circuit conditions
- Excellent dynamic response to load changes
- Very low output ripple and spikes

Functionalities

- Redundant parallel operation with undervoltage alarm contact
- Screwdriver adjustable or analog programmable
- Parallel and series operation
- 19" rack mounting or wall mounting
- Convection cooling
- Remote sensing

S280 Series

280 W DC POWER SUPPLIES




Features

- Output programmable from zero till max.
- Very high reliability, designed for long life at full power
- EMC surpasses CE requirements: low emission & high immunity
- Protected against all overload and short circuit conditions
- Very low output ripple and spikes

Functionalities

- Screwdriver adjustable or analog programming
- Master / Slave parallel operation with current sharing
- Optional with external interfaces Ethernet, IEEE488, RS232 or ISO AMP.

 Details about interfaces:
Page 21-24

- Euro rack mounting or wall mounting
- Redundant parallel operation with optional RA-10 adapter
- Convection cooling
- Remote sensing

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Dimensions and Weight

Height = 88 mm Weight = 11 kg
Width = 433 mm
Depth = 385 mm

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Dimensions and Weight


Height = 106 mm Weight = 2,8 kg
Width = 195 mm
Depth = 166 mm

Specifications

- Single phase input : 198-264 V AC (48-62 Hz)
99-132 V AC (48-62 Hz)
- Power Factor Correction : up to 0.76 (at 100 % load)
- Efficiency : up to 89% (at full load)
- Output ripple and spikes : 7 mV_{rms} / 20 mV_{pp}
- Regulation : 10 mV (0-100% load step)
- Recovery time : 300 μs (50-100% load step)
- Stability : 30.10⁻⁵
- MTBF : up to 1.000.000 hrs
- Operating ambient temperature : -20 to +50 °C, derate current linearly to 20% at 75 °C

Specifications

- Single phase input : 195-265 V AC (48-62 Hz)
100-132 V AC (48-62 Hz)
- Efficiency : up to 88% (at full load)
- Output ripple and spikes : from 5 mV_{rms} / 25 mV_{pp}
- Regulation : 5 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 10 ms (10 to 90%)
- Analog programming accuracy : from 0.2%
- Stability : 50.10⁻⁵ / 10.10⁻⁴
- MTBF : 500.000 hrs
- Operating ambient temperature : -20 to +50 °C

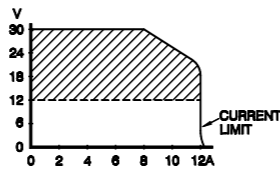


Features

- Very high reliability, designed for long life at full power
- EMC surpasses CE requirements: low emission & high immunity
- Protected against all overload and short circuit conditions
- Excellent dynamic response to load changes
- Very low output ripple and spikes

Functionalities

- Redundant parallel operation with under voltage alarm contact
- Screwdriver adjustable or analog programmable
- Parallel and series operation
- Bench operation with bench adapter (optional)
- Euro rack, 19" rack or wall mounting
- Convection cooling
- Remote sensing

Model	Voltage range	Current range
240 S 24	12 - 15 V	12 A
	24 V	10 A
	30 V	8 A



Features

- Very high reliability, designed for long life at full power
- EMC surpasses CE requirements: low emission & high immunity
- Protected against all overload and short circuit conditions
- Excellent dynamic response to load changes
- Very low output ripple and spikes

Functionalities

- 2 outputs: series mode, parallel mode or dual mode
- Redundant parallel operation with external diodes
- Remote control with an external potentiometer
- Bench operation with bench adapter (optional)
- Euro rack, 19" rack or wall mounting
- Convection cooling

Models	Voltage range	Current range
75 SX 5	3.5 - 6 V	13 A
150 SX 5	3.5 - 6 V	26 A
75 SX 15-15	2 x 6 - 15 V	2.5 A
150 SX 15-15	2 x 6 - 15 V	5 A
150 SX 75-75	2x 15 - 75 V	1 A
150 SX 200 - 200	2x 35 - 200 V	0.3 A
ST 150	3.5 - 6 V	13 A
	2x 6 - 15 V	2.5 A

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Dimensions and Weight

Height = 240 mm Weight = 2 kg
Width = 71 mm
Depth = 156 mm

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Dimensions and Weight


75SX	150SX
Height = 100 mm	Height = 233 mm
Width = 36 mm	Width = 36 mm
Depth = 172 mm	Depth = 172 mm
Weight = 0,6 kg	Weight = 1,2 kg

Specifications

- | | |
|---|--|
| • Single phase input : 195-265 V AC (48-62 Hz)
100-132 V AC (48-62 Hz) | • Recovery time : 200 μs (50-100% load step) |
| • Efficiency : up to 87% (at full load) | • Stability : 30.10 ⁻⁵ |
| • Output ripple and spikes : 5 mV _{rms} / 15 mV _{pp} | • MTBF : 1.000.000 hrs |
| • Regulation : from 10 mV (0-100% load step, external sensing) | • Operating ambient temperature : -10 to +50 °C, derate current linearly to 20% at 80 °C |

Specifications

- | | |
|---|--|
| • Single phase input : 185-264 V AC (48-62 Hz)
98-132 V AC (48-62 Hz) | • Stability : 50.10 ⁻⁵ |
| • Efficiency : up to 84% (at full load) | • MTBF : 1.000.000 hrs |
| • Output ripple and spikes : from 5 mV _{rms} / 20 mV _{pp} | • Operating ambient temperature : -20 to +50 °C, derate current linearly to 20% at 75 °C |
| • Regulation : from 10 mV (0-100% load step) | |
| • Recovery time : from 100 μs (50-100% load step) | |



Features

- Very low output ripple and spikes (linear design)
- Protected against all overload and short circuit conditions
- Excellent dynamic response to load changes
- Very high reliability, designed for long life at full power

Models	Voltage range	Current range
5 U 5 (voltage source)	5 - 6 V	1 A
5 U 15 - 15 (voltage source)	2 x 12 - 15 V	0.2 A
UCS 50 (current source)	30 V	0 - 50 mA

Functionalities

- Accurate 20 turn trimmer for adjusting output voltage (5U5, 5U15-15) or current (UCS50)
- Parallel and series operation
- Eurocard, rail or wall mounting
- Convection cooling

Standards

- Power supply standard : EN 61204-3
- Generic Emission : EN 61000-6-3 (EN55022B)
- Generic Immunity : EN 61000-6-2
- Safety : EN 60950 / EN 61010
- Insulation input / output : 3750 V_{rms}
- Enclosure : IP20

Dimensions and Weight

Height = 35 mm Weight = 0,4 kg
Width = 58 mm
Depth = 94 mm

Specifications

- Single phase input : 230 / 115 V AC (48-62 Hz)
- Output ripple and spikes : 0.5 mV_{rms} / 2 mV_{pp} for 5U5 and 5U15-15
30 μA_{pp} for UCS50
- Regulation : 5 mV (0-100% load step) for 5U5 and 5U15-15
3 μA (load 600-0 Ohm) for UCS50
- Recovery time : from 10 μs (10-100% load step)
- MTBF : 1.000.000 hrs
- Operating ambient temperature : -20 to +50 °C



Features

- Voltage and current programming and monitoring
- Uses existing IP-networks
- Integrated sequencer
- Software calibration
- Isolated digital user in- and outputs
- Factory installed or external module

Specifications

- Programming and monitoring resolution : 16 bit
- Linearity error : +/- 2 LSB (prg.)
+/- 1 LSB (mon.)
TC = 10 ppm/°C
- Input voltage (external module) : 98-264 V AC (48-62 Hz)

Model	
PSC-ETH	Ethernet Controller

Functionalities



Interface:

- Monitoring status outputs: ACF, DCF, CC-mode, Over Temp, PSOL etc.
- Isolated user inputs (8) and outputs (6)
- Software calibration for off-set and full scale



Integrated sequencer:

- Converts power supply into an arbitrary waveform generator
- Stand-alone automation like a PLC
- 25 free programmable sequences, 2000 steps each
- Combination of very fast and slow sequences
- Possibility to create loops, sub-routines, ramps etc.

External module


Standards:

- Generic Emission : EN 61000-6-3 (EN55022B)
- Generic Immunity : EN 61000-6-2
- Safety : EN 60950 / EN 61010
- Insulation in/outputs - case : 1000 V_{DC}
- Enclosure : IP20

Dimensions and weight:

Dimensions: 89 x 86 x 119 mm
Weight: 0,7 kg
Optional 19" rack mounting



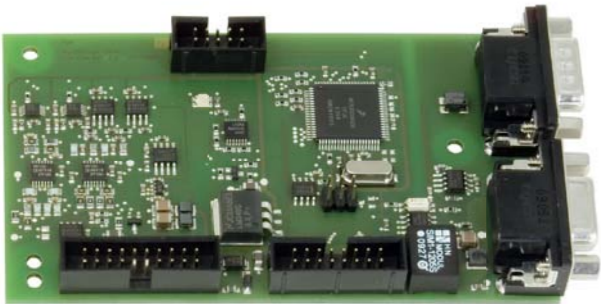

Features

- Voltage and current programming and monitoring
- Node address setting selectable
- Read back of power supply status signals
- 600 V galvanic isolation
- Factory installed

Specifications

- Programming and monitoring resolution : 14 bit
- Communication speed : up to 12Mbit/s for PSC-PB
up to 1Mbit/s for PSC-CAN
- Full scale accuracy : < 0.1%

Models	
PSC-CAN	CANopen Controller
PSC-PB	PROFIBUS Controller



Features

- Voltage and current programming and monitoring
- Up to 15 PSCs on one BUS
- Software calibration
- Isolated digital user in- and outputs
- Factory installed or external module

Specifications

- Programming and monitoring resolution : 16 bit
- Linearity error : +/- 2 LSB (prg.)
+/- 1 LSB (mon.)
TC = 10 ppm/°C
- Input voltage (external module) : 98-264 V AC (48-62 Hz)

Models	
PSC-232	RS232 Controller
PSC-488	IEEE488 Controller

Functionalities


CANopen Functionalities:

- SYNC Object
- Emergency Object
- Node Guarding
- Heartbeat
- Expedited and Nonexpedited SDO transfer
- Node address range 1 - 127



PROFIBUS Functionalities:

- Slave in a PROFIBUS-DP network
- DP-V0 standard acc. IEC 61784 Ed. 1:2002 CPF 3/1
- PROFIBUS protocol acc. IEC 61158
- Slave address range 1 - 127

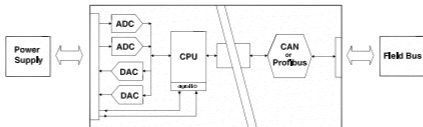

Functionalities

- Monitoring status outputs: ACF, DCF, CC-mode, Over Temp, PSOL etc.
- Two isolated user inputs and outputs (external modules only)
- Software calibration for offset and full scale
- PSC-488 models can also be configured as PSC-232

External module

Standards:

- Generic Emission EN 61000-6-3 (EN55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 1000 V_{rms}
- Enclosure IP20

Dimensions and weight:

Dimensions: 89 x 86 x 119 mm
Weight: 0,8 kg
Optional 19" rack mounting



Analog Series

ANALOG INTERFACES

Model

ISO AMP Isolated Analog Programming



Features


- Selectable 0-5 V and 0-10 V signal levels
- Isolated programming and monitoring of U, I and status signals
- Prevents problems with earth loops and CM-voltages
- Factory installed or **external module**

Specifications

- Programming and monitoring offset : +/- 60 µV typical
- Full scale error : 0.1% calibrated
- Non-linearity : 0.01% typical, TC = - 65ppm/°C
- Common mode rejection : 80 dB @ 50 Hz

Model

M / S - ADAPTER Master / Slave Series Adapter

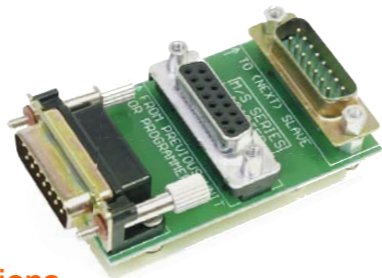

Features

- Connecting SM3000 and ES-series in M/S series mode
- Equal voltage sharing in series operation
- Series operation possible up to 600 V

Specifications

- Programming and monitoring offset : +/- 60 µV typical
- Full scale error : 0.1% calibrated
- Non-linearity : 0.01% typical, TC = - 65ppm/°C
- Common mode rejection : 80 dB @ 50 Hz

Model

AL 24-48 Under and Over Voltage Alarm



Features

- Large adjustment for use on both 24 V and 48 V
- Two isolated comparator circuits with alarm contact and LED indication
- Monitors output voltage of 2 power supplies

Specifications

- Undervoltage range : 18-48 V
- Overvoltage range : 24-64 V
- Insulation between circuits : 500 V DC
- Alarm contact : 100 mA / 30 V, Normally Closed

ELSO
riešenia na presné meranie
<http://www.else.sk>



DELTAELEKTRONIKA B.V.

PO Box 27
4300 AA Zierikzee
The Netherlands
Tel. +31 111 413656
Fax. +31 111 416919

Vissersdijk 4
4301 ND Zierikzee
The Netherlands

www.deltapowersupplies.com



ELSO

riešenia na presné meranie™

Elso Philips Service; tel: +421 32 6582410
email: elso@elso.sk; web: www.else.sk

DC POWER SUPPLIES